




FRONT VIEW

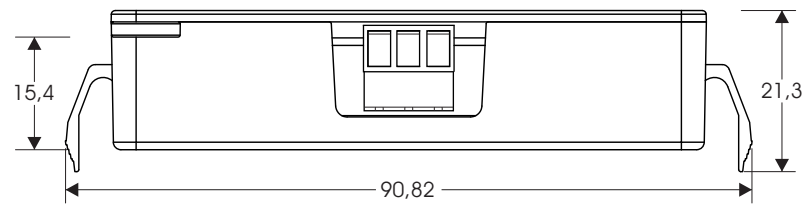


TOP VIEW

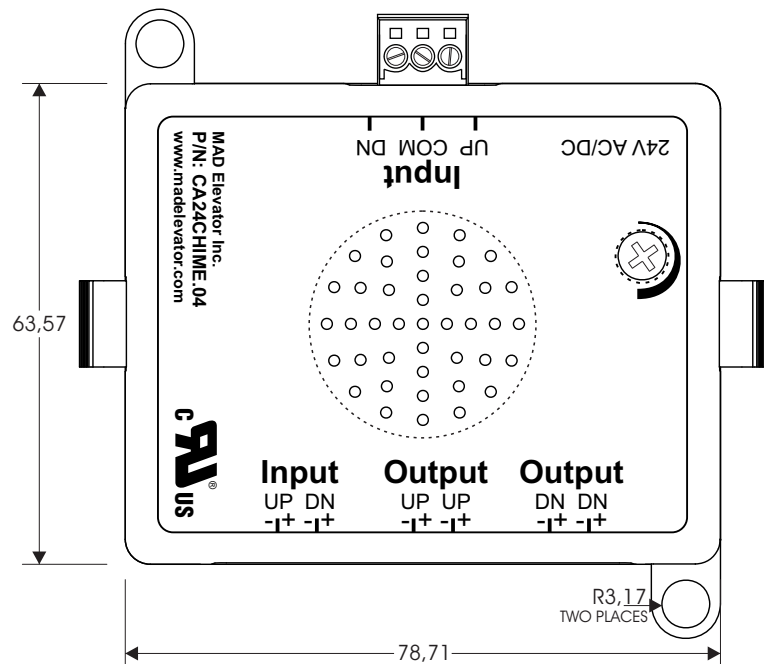


REAR VIEW

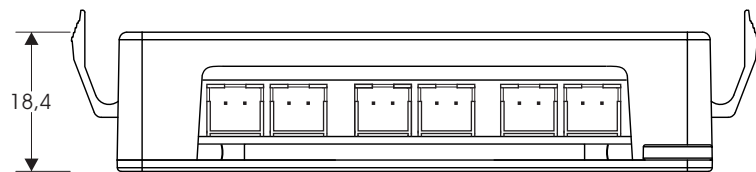

BOTTOM VIEW

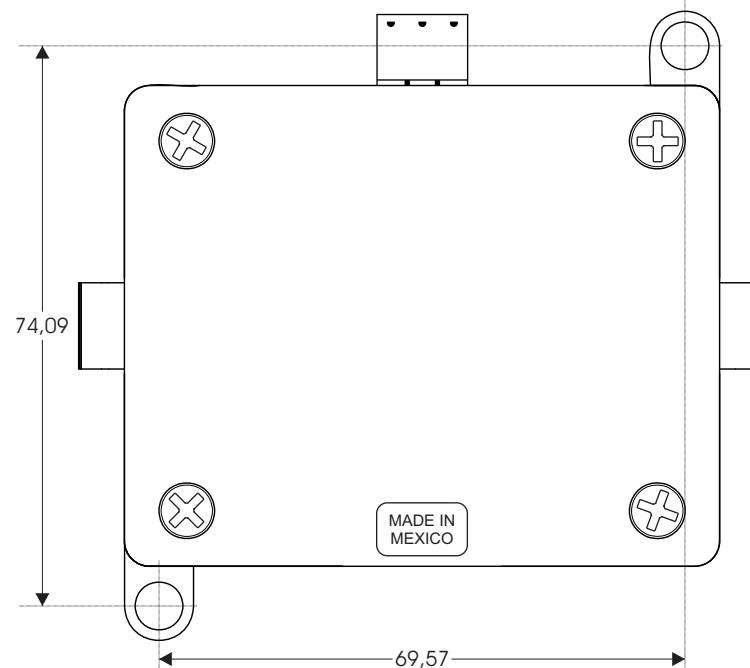

HARNESS CONNECTOR

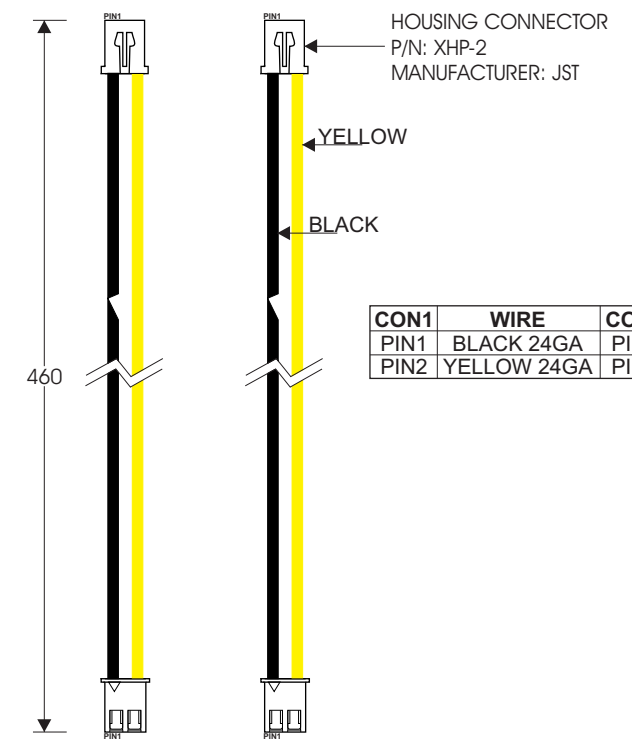


CON1	WIRE	CON2
PIN1	BLACK 24GA	PIN1
PIN2	YELLOW 24GA	PIN2

WIRE FEATURES:
 ■ Wire black 24GA 300V 105°C
 ■ Wire yellow 24GA 300V 105°C

SPECIFICATIONS:

- Operating voltage: 24V DC/AC +/-2.5V.
- Standby current: 24mA.
Operating current (During sound cycle): 240mA.
- Sound amplitude: Min. 95 DB to 305mm(1ft), scaleA.
- Base frequency: 750 +/- 100Hz.
- Chime duration: 1.4 +/- 0.2 seconds.
- Loudness control.
- 1&2 Stroke
UP: 1 stroke
DOWN: 2 stroke

DATE	NEC.	REV.	DESCRIPTION	OWN.	CHKD.	APP.
06-07-2017	1392	B	CHANGE WEBSITE ON LABEL	FACH	ALGH	ALF
11-11-2015	1311	A	CHANGE CHIME OF 24V DC/AC	FACH	CRA	ALF



UNLESS OTHERWISE SPECIFIED
 DIMENSIONS: MILLIMETERS
 TOLERANCES: +/-0.25MM
 ANGLES:
 SCALE: NO SCALE

TITLE:	REFERENCE:	DRAWING:
DUAL STROKE CHIME N PLAY	1P-622-T1	S.O.S
	DATE: 05-NOV.-15	CHECKED: F.A.C.H.
P.N. MURCAR: 1E-622-T1	P.N. CLIENT: CA24CHIME.04	SHEET OF 1 1
		APPROVED: A.L.F.